


WAAS CH 61215 W05A	APP CRS 050°	Rwy Idg 5501 TDZE 181 Apt Elev 182
--	------------------------	---

RNAV (GPS) RWY 5
SUMTER (SMS)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Procedure NA when R-6002A is active. Circling NA to Rwy 14-32. When local altimeter setting not received, use Camden altimeter setting and increase all DA 65 feet and all MDA 80 feet and LPV all Cats, LNAV/VNAV all Cats, LNAV Cats C/D, and Circling Cats C/D visibilities ¼ mile. VDP and Baro/VNAV NA when using Camden altimeter setting.

MISSED APPROACH: Climb to 2400 direct GAUGH and hold.

AWOS-3 118.075	SHAW APP CON* 125.4	UNICOM 122.7 (CTAF) 0
--------------------------	-------------------------------	--

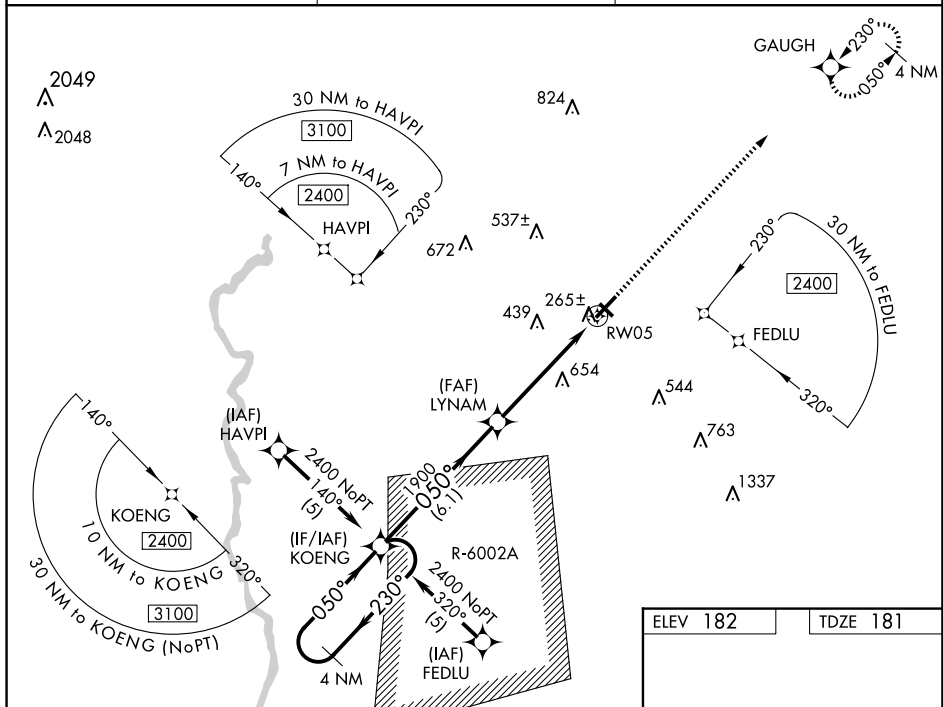

SE-2, 12 JUN 2025 to 10 JUL 2025

[illegible]