


WAAS CH 58141 W23A	APP CRS 230°	Rwy Idg 5501 TDZE 182 Apt Elev 182
--	------------------------	---

RNAV (GPS) RWY 23

SUMTER (SMS)

RNP APCH. ⚠ Circling NA to Rws 14 and 32. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C or above 54°C. Inop table does not apply to LPV all Cats. For inop ALS increase LNAV/VNAV Cat A/B visibility to 7/5 SM.	ODALS ⬆ ⋮	MISSED APPROACH: Climb to 600 then climbing left turn to 2400 direct GAUGH and hold.
---	--	---

AWOS-3 118.075	SHAW APP CON★ 125.4	UNICOM 122.7 (CTAF) 0
--------------------------	-------------------------------	--

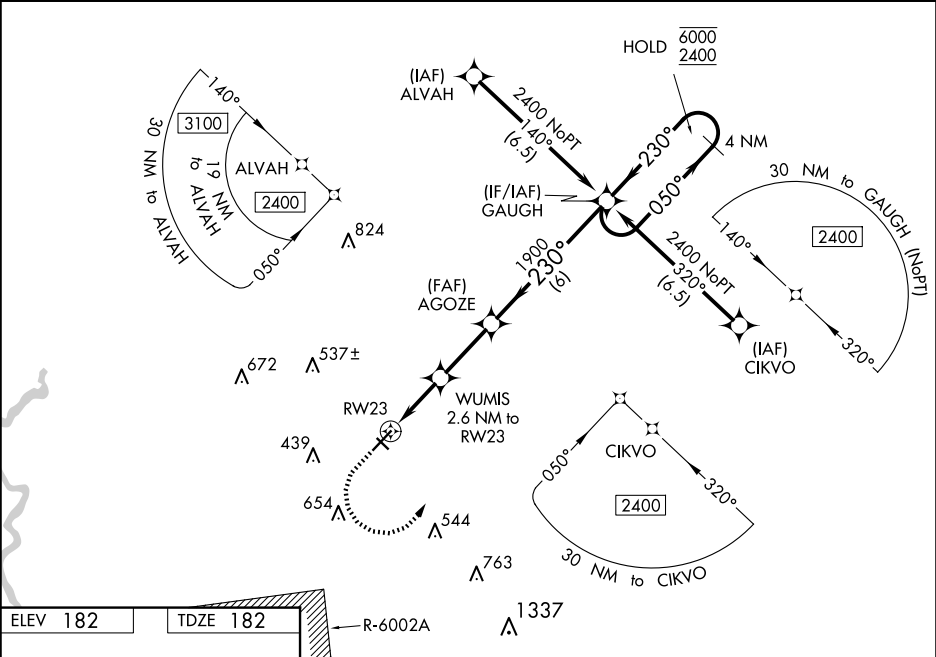

MIRL Rwy 5-23 **0**
REIL Rws 5 and 23 **0**

600

↑

2400

↶

GAUGH

✧

*LNAV only.

WUMIS 2.6 NM to RW23

*1 NM to RW23

RW23

1 NM

1.6 NM

2.7 NM

6 NM

AGOZE 1900

230°

1900

1040*

GAUGH

4 NM Holding Pattern

050° → 6000

← 230° 2400

GP 3.00° TCH 44

CATEGORY	A	B	C	D
LPV DA	382-¾		200 (200-¾)	
LNAV/VNAV DA	460-¾		278 (300-¾)	
LNAV MDA	540-¾ 358 (400-¾)		540-7/8 358 (400-7/8)	
C CIRCLING	600-1 418 (500-1)	680-1 498 (500-1)	1000-2½ 818 (900-2½)	1000-2¾ 818 (900-2¾)