

WAAS CH 58112 W05A	APP CRS 050°	Rwy Idg 5001 TDZE 123 Apt Elev 125
--	------------------------	---

RNAV (GPS) RWY 5



BARTOW EXEC (BOW)

RNP APCH.

T Rwy 5 helicopter visibility reduction below $\frac{3}{4}$ SM NA. When local altimeter setting not received, use Tampa Int'l altimeter setting and increase LPV DA to 553 feet, LNAV/VNAV DA to 684 feet and all MDA 120 feet, increase LNAV Cat C visibility $\frac{1}{4}$ SM, Cat D $\frac{1}{2}$ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. VDP and Baro-VNAV NA when using Tampa Int'l altimeter setting.

MISSED APPROACH:
Climb to 2300 direct
ZOMOV and hold.

AWOS-3 123.775	TAMPA APP CON 120.65 290.3	BARTOW TOWER ★ 121.2 0 (CTAF)	GND CON 121.9	UNICOM 122.95
--------------------------	--------------------------------------	---	-------------------------	-------------------------

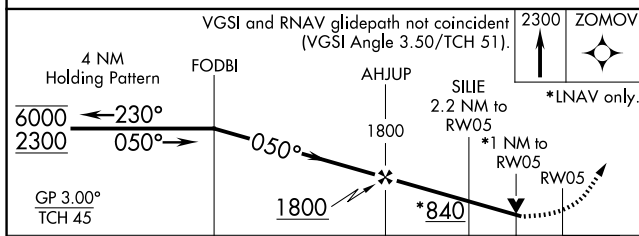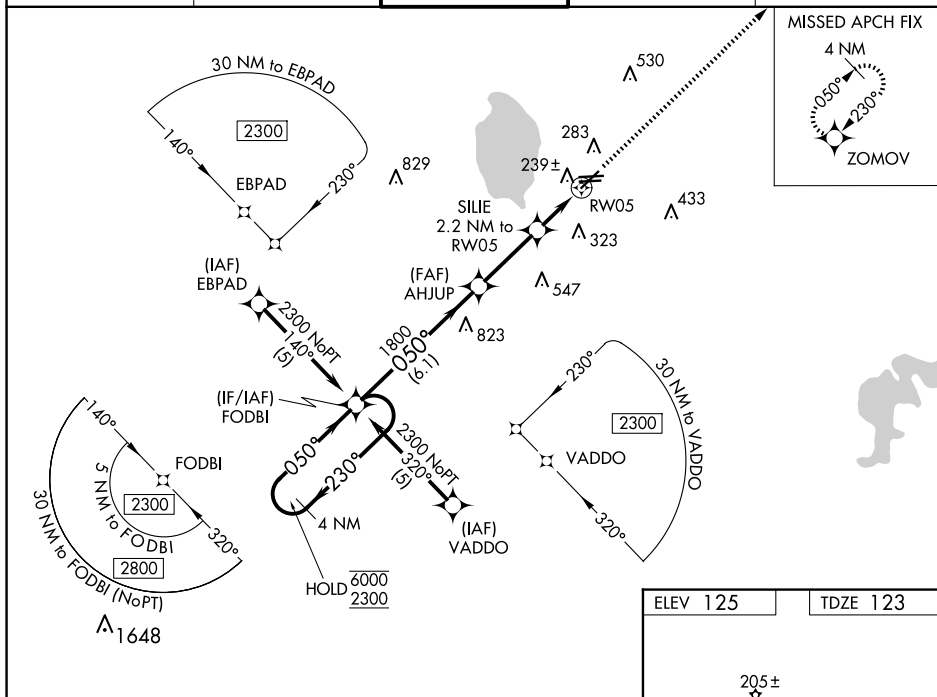

				6.1 NM	2.9 NM	1.2 NM	1 NM		
CATEGORY	A	B	C	D					
LPV DA	447-1¼		324 (400-1¼)						
LNAV/ VNAV DA	509-1½		386 (400-1½)						
LNAV MDA	520-1 397 (400-1)		520-1⅛ 397 (400-1⅛)		520-1¼ 397 (400-1¼)				

