

WAAS CH 40405 W09A	APP CRS 093°	Rwy Idg 4801 TDZE 3 Apt Elev 3
--	------------------------	---

RNAV (GPS) RWY 9

KEY WEST INTL (EYW)

RNP APCH-GPS.

▼


▲

W

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 12°C or above 54°C.
Rwy 9 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using
NQX altimeter setting. When local altimeter setting not received, use NQX altimeter setting.

MISSED APPROACH:
Climb to 2000 direct
BURPY and hold.

ATIS 119.675	NAVY KEY WEST APP CON ★ 124.025 313.7	KEY WEST TOWER ★ 118.2 (CTAF) 257.8	GND CON 121.9	CLNC DEL 121.9	UNICOM 122.95
------------------------	---	---	-------------------------	--------------------------	-------------------------

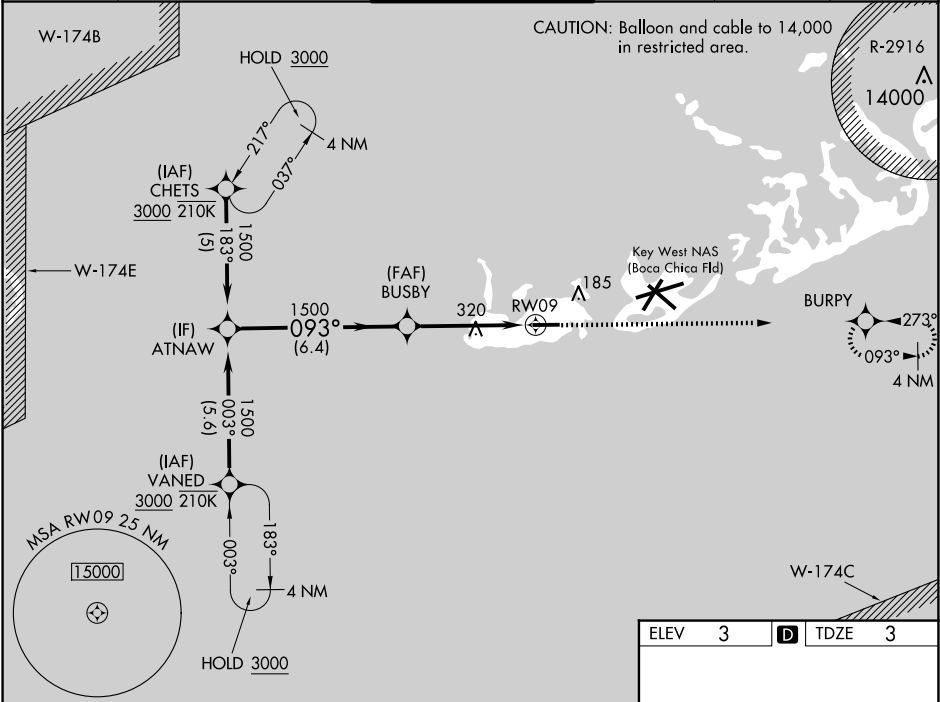

ATNAW

BUSBY

1500

1500

1500

GP 3.00°
TCH 35

2000

BURPY

1.7 NM to RWY 09

RWY 09

6.4 NM

2.9 NM

1.7 NM

CATEGORY	A	B	C	D
LPV DA	253-1 250 (300-1)			
LNAV/VNAV DA	425-1¼ 422 (500-1¼)			
LNAV MDA	580-1 577 (600-1)		580-1⅝ 577 (600-1⅝)	
CIRCLING	580-1 577 (600-1)		620-1¾ 617 (700-1¾) 620-2 617 (700-2)	

093°

5076 X 100

TWR 79 71

MIRL Rwy 9-27
REIL Rws 9 and 27