

WAAS CH 93836 W12A	APP CRS 127°	Rwy Ldg TDZE Apt Elev 7506 4457 4457
--	------------------------	--

RNAV (GPS) RWY 12


LAS CRUCES INTL (LRU)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12 °C (11°F) or above 49°C (120°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Deming altimeter setting. When local altimeter setting not received, use Deming altimeter setting: increase LPV DA to 4821 feet and LNAV/VNAV DA to 4824 feet and all visibilities ½ mile; increase all MDA 120 feet and visibility Cat C and D ½ mile.

MISSED APPROACH: Climb to 5800 then climbing right turn to 8100 direct IPATE and hold.

AWOS-3 119,025	ALBUQUERQUE CENTER 128.2 285.5	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------------

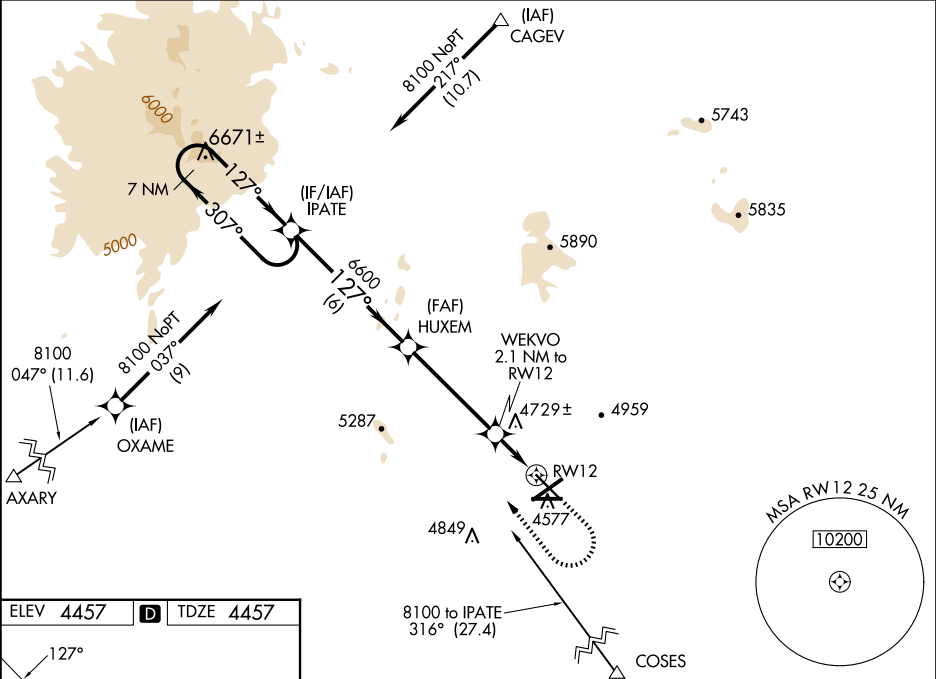

ELEV 4457 D TDZE 4457

127°

7506 X 100

7501 X 105

6069 X 100

0.3° UP

30°

REIL Rwy 12

HIRL Rwy 12-30 0

MIRL Rwy 4-22 and 8-26 0

7 NM Holding Pattern 8100 ← 307° 127° → GP 3.00° TCH 55				IPATE HUXEM 6600 6600 6 NM 4.5 NM		WEKVO 2.1 NM to RW12 *1.2 NM to RW12 RW12 0.9 1.2 NM		5800 8100 IPATE *LNAV only.		
CATEGORY	A	B	C	D						
LPV DA	4707- ³ / ₄				250 (300- ³ / ₄)					
LNAV/VNAV DA	4710- ³ / ₄				253 (300- ³ / ₄)					
LNAV MDA	4900-1		443 (500-1)		4900-1 ³ / ₈		443 (500-1 ³ / ₈)			
CIRCLING	4900-1		5040-1		5320-2 ¹ / ₂		5320-2 ³ / ₄			
	443 (500-1)		583 (600-1)		863 (900-2 ¹ / ₂)		863 (900-2 ³ / ₄)			