



APP CRS	Rwy Ldg	8605
168°	TDZE	27
	Apt Elev	27

RNAV (RNP) Z RWY 17L

SACRAMENTO INTL (SMF)

RNP AR APCH-GPS.			MALSR 	MISSED APPROACH: Climb to 500 then right turn to 3000 direct GRIME and hold. *Missed approach requires minimum climb of 290 feet per NM to 3000. #Missed approach requires minimum climb of 300 feet per NM to 3000.			
 For uncompensated Baro-VNAV systems, procedure NA below -2°C or above 54°C. For inop ALS, increase RNP 0.12 all Cats visibility to RVR 4000; increase RNP 0.30 all Cats visibility to RVR 4500.							
D-ATIS	NORCAL APP CON			CAPITOL TOWER	GND CON	CLNC DEL	CPDLC
126.75	125.4	259.1 (W-NE)	125.25 257.9 (SW)	125.7 256.7	121.7 256.7	121.1 256.7	
	127.4	317.5 (E-SE)					

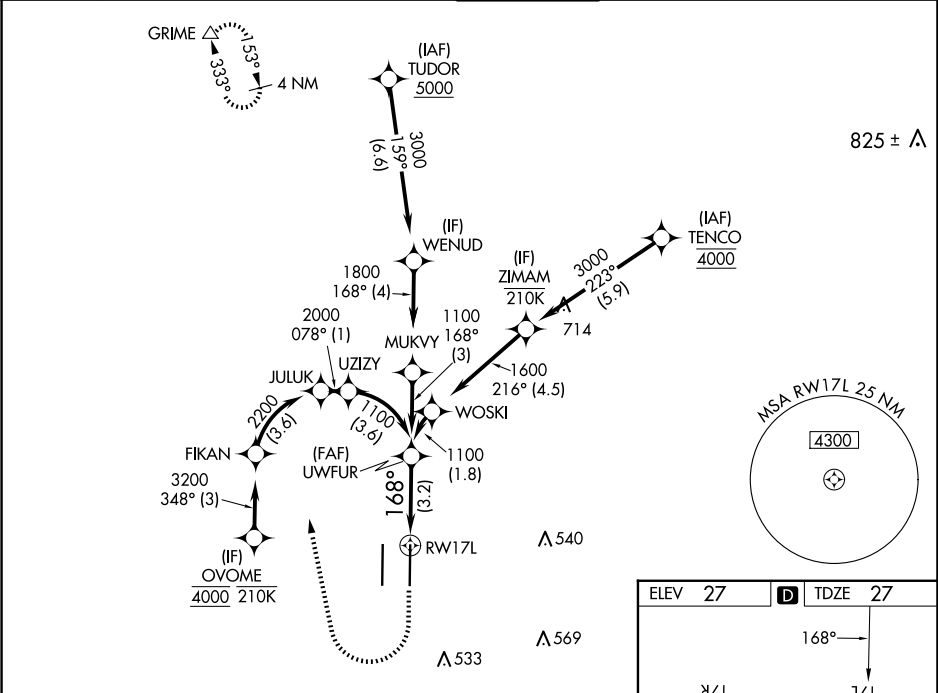

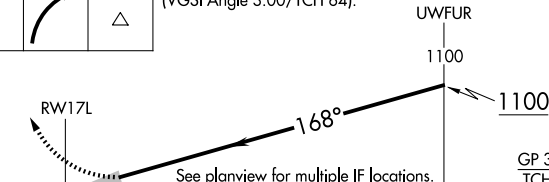500	3000	GRIME	VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 64).			
						
CATEGORY	A	B	C	D		
RNP 0.12 DA#	277/24 250 (300-½)					
RNP 0.30 DA*	339/24 312 (400-½)					
AUTHORIZATION REQUIRED						

