


25163

ILS or LOC RWY 26R
ONTARIO INTL (ONT)

MISSED APPROACH: Climb to 2800 then climbing left turn to 5400 direct PDZ VORTAC and hold, continue climb-in-hold to 5400.

D-ATIS 124.25	SOCAL APP CON 127.0 318.2	ONTARIO TOWER 120.6 360.775	GND CON 121.9 257.8	CLNC DEL 132.9	CPDLC
-------------------------	-------------------------------------	---------------------------------------	-------------------------------	--------------------------	-------

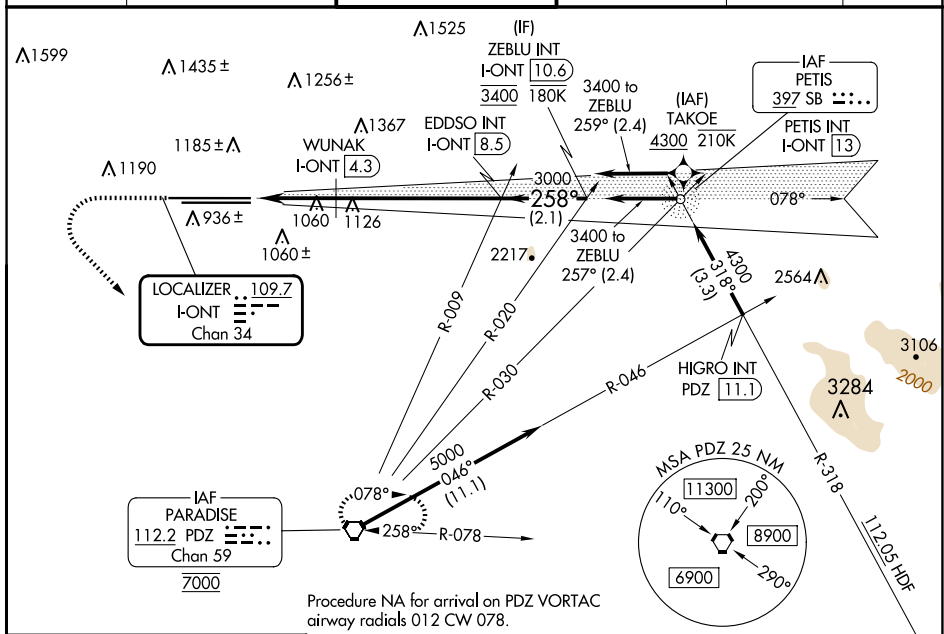

Procedure NA for arrival on PDZ VORTAC
airway radials 012 CW 078.

ELEV 944 D TDZE 26R 932
TDZE 26L 926

TDZ/CL Rwy 8L, 26L and 26R
HIRL Rwy 8L-26R and 8R-26L

2800 ↑ 5400 ↘ PDZ

WUNAK I-ONT 4.3

I-ONT 2.2 I-ONT 3.3

EDDSO INT I-ONT 8.5

ZEBLU INT I-ONT 10.6

GS 3.00° TCH 60

258°

1680 3000 3400

1.2 NM 1 NM 4.1 NM 2.1 NM

CATEGORY	A	B	C	D
S-ILS 26R	1132/18 200 (200-½)			
S-LOC 26R	1680/24 748 (800-½)	1680/40 748 (800-¾)	1680-1¾ 754 (800-1¾)	1680-2 754 (800-2)
SIDESTEP 26L	1680/55	754 (800-1)	1680-1¾ 754 (800-1¾)	1680-2 754 (800-2)
C CIRCLING	1680-1 736 (800-1)	1680-1¼ 736 (800-1¼)	1680-2¼ 736 (800-2¼)	1680-2½ 736 (800-2½)
WUNAK FIX MINIMUMS (DME REQUIRED)				
S-LOC 26R	1320/24 388 (400-½)	1320/35 388 (400-¾)		

FAF to MAP 6.3 NM

Knots	60	90	120	150	180
Min:Sec	6:18	4:12	3:09	2:31	2:06

ONTARIO INTL (ONT)
ILS or LOC RWY 26R

SW-3, 12 JUN 2025 to 10 JUL 2025