

ST LOUIS LAMBERT INTL (STL)(KSTL) 10 NW UTC-6(-5DT) N38°44.92' W90°22.20'

617 B LRA Class I, ARFF Index D NOTAM FILE STL

ST LOUIS
H-5D, L-27B, A
IAP, DIAP, AD

RWY 12R-30L: H11020X150 (CONC-GRVD) S-75, D-200, 2S-175, 2D-350, 2D/2D2-760 PCN 85 R/B/W/T HIRL CL
RWY 12R: MALSR. TDZL. PAPI(P4L)—GA 3.0° TCH 71'. RVR-TR Thld dsplcd 468'. Tree. Rgt tfc.
RWY 30L: MALSR. PAPI(P4R)—GA 3.0° TCH 58'. RVR-TR Thld dsplcd 201'. Tree. 0.7% down.
RWY 12L-30R: H9013X150 (CONC-GRVD) S-75, D-200, 2S-175, 2D-350, 2D/2D2-760 PCN 85 R/B/W/T HIRL CL
RWY 12L: ALSF2. TDZL. PAPI(P4R)—GA 3.0° TCH 56'. RVR-TMR Tree. 0.7% up.
RWY 30R: ALSF2. TDZL. PAPI(P4R)—GA 3.0° TCH 55'. RVR-TMR Tree. Rgt tfc. 1.0% down.
RWY 11-29: H9000X150 (CONC-GRVD) S-75, D-200, 2D-325, 2D/2D2-700 PCN 85 R/B/W/T HIRL CL
RWY 11: ALSF2. TDZL. PAPI(P4R)—GA 3.0° TCH 67'. RVR-TMR Rgt tfc. 0.6% down.
RWY 29: ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 73'. RVR-TMR Tree. 0.7% up.
RWY 06-24: H7603X150 (CONC-GRVD) S-75, D-176, 2S-175, 2D-280, 2D/2D2-660 PCN 85 R/B/W/T HIRL
RWY 06: MALSR. PAPI(P4R)—GA 3.0° TCH 51'. RVR-TR Tree.
RWY 24: MALSR. PAPI(P4L)—GA 3.0° TCH 53'. RVR-TR Sign.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 06: TORA-7603 TODA-7603 ASDA-7323 LDA-7323
RWY 11: TORA-9000 TODA-9000 ASDA-9000 LDA-9000
RWY 12L: TORA-9013 TODA-9013 ASDA-8956 LDA-8956
RWY 12R: TORA-11020 TODA-11020 ASDA-11020 LDA-10553
RWY 24: TORA-7603 TODA-7603 ASDA-7603 LDA-7603
RWY 29: TORA-9000 TODA-9000 ASDA-9000 LDA-9000
RWY 30L: TORA-11020 TODA-11020 ASDA-10880 LDA-10679
RWY 30R: TORA-9013 TODA-9013 ASDA-9013 LDA-9013


ARRESTING GEAR/SYSTEM

RWY 12R BAK-14 BAK -12B(B) (1090')
RWY 06 BAK-14 BAK -12B(B) (1450')

BAK-14 BAK -12B(B) (1300') **RWY 30L**

SERVICE: S4 **FUEL** 100LL, JET A **OX** 1, 2, 3, 4 **MILITARY**—A **GEAR** Retractable BAK-12B(B) avbl Rwy 06, 12R, and 30L. A-G are kept in recessed posn til req for use. Twr must be notified at least 5 sec prior to engagement so that cable may be raised. **JASU** 1(AM32A-60A) 5(MA-1A) **FUEL** 100LL A **FLUID** SP LHOX **OIL** O-128-133-(148 Mil) SOAP

AIRPORT REMARKS: Attended continuously. Fuel: A: Jet-A. Twy D or Taxilane C from Twy S to Twy G, B-747 or larger acft are not authorized to pass or be passed by B-767 or larger acft operating on the parallel Twy/Taxilane. Twy November btm Rwy 24 and Foxtrot, rstrd to acft with a wingspan of less than 79 ft (CRJ-900 or smlr) when acft are parked on the November Pad. This area is rstrd to all opns when acft are performing end run-ups in the November Pad. Taxiway Victor, underlying the Runway 12L final approach course is restricted to aircraft with a tail height of 25' or less (CRJ-700 or smaller), when aircraft are landing on Runway 12L. Twy Charlie, east of Twy Delta One to the AER 30L, restricted to B-737 or smlr acft (wingspan less than 118 ft) when acft are parked on the Hotel pad. Taxilane Charlie, from Twy Charlie Six to Twy Delta Four, rstrd to a B757-300 series or smlr when passing bhnd acft that have made the initial 10 ft pushback. Twy A east of Twy T, Twy S and Rwy 06-24 south of Twy B, no acft or vehicle ops when arriving or departing Rwy 11 or arriving Rwy 29. Taxiway Lima, north of Runway 12L-30R, aircraft larger than a Gulfstream VI taxiing northbound are prohibited from making a right turn eastbound on Taxiway Foxtrot. Twy V2 is unavbl to B-767 or larger acft (wingspan 118' or greater). Twy V2, B-737 (wingspan greater than 79' but less than 118') must perform judgmental oversteering instead of cockpit over cntrln steering when tax. Twy K1 is unavbl to B-767 or larger acft (wingspan 118' or greater). Twy Echo, btm Twy November and Twy Lima rstrd to B-767 or smlr acft (wingspan less than 171 ft) when acft are parked on the Echo Pad. Twy Charlie, fm Twy Sierra to Twy Charlie Seven, rstrd to B-767 or smlr acft (156 ft avbl) when acft are parked in the Charlies Pad. Rstrn is for tax acft, lrg acft may be towed thru area. Twy Charlie, from Twy Charlie Seven to Twy Charlie Six, rstrd to a B757-300 series or smlr. Wg tip clnc with gnd veh not adqt alg N side of main trml apn. ASDE-X in use. Operate transponders with altitude reporting mode and ADS-B (if equipped) enabled on all airport surfaces. Waiver to conduct simul apchs to parl nys separated by 1,300 ft in efct. Ldg fee: Ldg fee based on acft weight collected by FBO. Flight Notification Service (ADCUS) avbl.

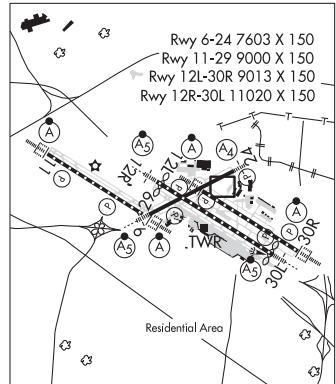

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

AIRPORT MANAGER: 314-426-8000

WEATHER DATA SOURCES: ASOS (314) 238-8419. LAWRS. LLWAS. TDWR.

COMMUNICATIONS: D-ATIS 125.025 379.925 (314)890-4777 UNICOM 122.95

ST LOUIS RCO 122.6 (ST LOUIS RADIO)

® ST LOUIS APP CON 132.125 360.6

ST LOUIS TOWER 118.5 257.7(Rwy 12R-30L) 120.05 284.6(Rwy 12L-30R, 24) 132.475 239.275(Rwy 06, 11-29)

ST LOUIS GND CON 121.9 348.6(Inbound) 121.65 377.175(Outbound) 118.925 227.125(Rwy 11-29)

GND METERING 127.55 360.2(East) 121.075 346.35(West)

CLNC DEL 119.5 363.1

® ST LOUIS DEP CON 128.1 307.05(S/W) 119.15 335.5(N/E)

CPDLC (LOGON KUSA)

PDC

AIRSPACE: CLASS B See VFR Terminal Area Chart.

VOR TEST FACILITY (VOT) 111.0

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

RADIO AIDS TO NAVIGATION: NOTAM FILE STL.

CARDINAL (DL) DME 116.45 CSX Chan 111(Y) N38°45.16' W90°21.66' at fld. 556.

DME unusable:

027°-033° byd 30 NM blo 4,500'
 041°-138° byd 25 NM blo 4,500'
 164°-234° byd 15 NM blo 3,000'
 164°-234° byd 24 NM blo 4,500'
 300°-016° byd 33 NM blo 4,500'

(VH) (H) VORTACW 117.4 STL Chan 121 N38°51.64' W90°28.94' 141° 8.5 NM to fld. 446/1E.

VOR unusable:

006°-016° byd 40 NM blo 7,000'
 006°-016° byd 62 NM
 017°-038° byd 40 NM
 039°-049° byd 40 NM blo 18,000'
 050°-076° byd 40 NM blo 5,000'
 050°-076° byd 50 NM blo 10,000'
 050°-076° byd 94 NM blo 18,000'
 077°-084° byd 40 NM
 085°-099° byd 40 NM blo 2,300'
 085°-099° byd 69 NM blo 18,000'
 100°-124° byd 40 NM
 125°-135° byd 40 NM blo 18,000'
 136°-147° byd 40 NM blo 6,000'
 136°-147° byd 59 NM
 148°-164° byd 40 NM
 165°-175° byd 40 NM blo 6,500'
 165°-175° byd 77 NM
 176°-189° byd 105 NM
 176°-189° byd 40 NM blo 14,000'
 190°-207° byd 40 NM blo 8,000'
 190°-207° byd 70 NM blo 11,000'
 190°-207° byd 85 NM blo 18,000'
 208°-218° byd 40 NM
 219°-229° byd 40 NM blo 2,400'
 219°-229° byd 49 NM
 230°-241° byd 40 NM blo 18,000'
 242°-254° byd 40 NM
 255°-265° byd 40 NM blo 18,000'
 266°-272° byd 40 NM
 273°-286° byd 40 NM blo 7,500'
 273°-286° byd 83 NM blo 18,000'
 287°-291° byd 40 NM
 292°-302° byd 40 NM blo 8,000'
 292°-302° byd 70 NM
 303°-313° byd 40 NM blo 18,000'
 314°-346° byd 40 NM
 347°-357° byd 40 NM blo 4,500'
 347°-357° byd 65 NM blo 8,000'
 347°-357° byd 79 NM
 358°-005° byd 40 NM

ILS/DME 110.3 I-JAK Chan 40 Rwy 06. DME also svcs Rwy 24. LOC unusable inside of .3 NM fm thr. DME unusable byd 8.5 NM blo 3,000'.

ILS/DME 111.95 I-OGZ Chan 56(Y) Rwy 11. Class IIIE.

ILS/DME 108.9 I-LDZ Chan 26 Rwy 12L. Class IIIE.

ILS/DME 109.7 I-LMR Chan 34 Rwy 12R. Class IB.

ILS/DME 110.3 I-STL Chan 40 Rwy 24. Class IC. LOC unusable byd 25° both sides. DME unusable byd 8.5 NM blo 3,000'.

ILS/DME 111.95 I-RQN Chan 56(Y) Rwy 29. Class IE.

ILS 111.5 I-BKY Rwy 30L. Class IT.

ILS/DME 111.3 I-SJW Chan 50 Rwy 30R. Class IIIE.

COMM/NAV/WEATHER REMARKS: A pre-taxi clnc program is in effect. IFR dep are req to contact St Louis CInc Del no more than 10 minutes prior to taxi time.

ST LOUIS DOWNTOWN (See CAHOKIA/ST LOUIS on page 230)

ST LOUIS RGNL (See ALTON/ST LOUIS on page 222)
