


WAAS CH 97321 W01A	APP CRS 010°	Rwy Idg TDZE 626 Apt Elev 638
--	------------------------	---


RNAV (GPS) RWY 1L
TULSA RIVERSIDE (RVS)

RNP APCH - GPS.	⚠ Circling NA northeast of Rwy 31 and 19L. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using TUL altimeter setting. When local altimeter setting not received, use TUL altimeter setting: increase LPV DA to 871 feet; increase LNAV/VNAV DA to 1152 feet and all visibilities 1/2 SM. Increase all MDAs 40 feet and Circling visibility Cat C 1/4 SM.	MISSED APPROACH: Climb to 1100 then climbing left turn to 2600 direct KEVIL and hold.
-----------------	--	---

ATIS 126.5	TULSA APP CON 134.7	RIVERSIDE TOWER★ 120.3 (CTAF) 0	GND CON 121.7	CLNC DEL 124.5	UNICOM 122.95
----------------------	-------------------------------	--	-------------------------	--------------------------	-------------------------

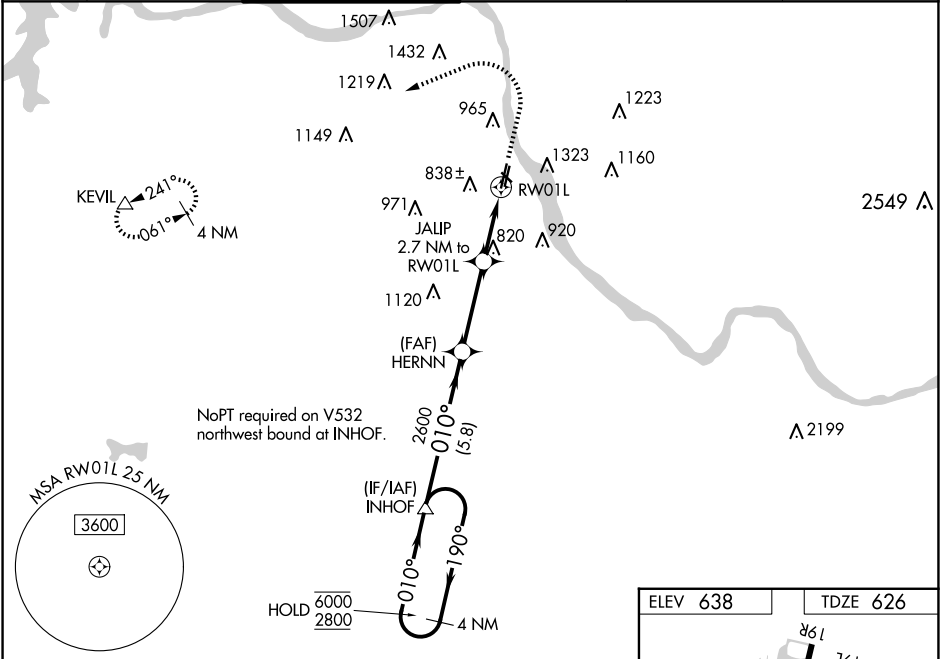

4 NM Holding Pattern	INHOF	HERNN	JAIP	RW01L
6000 2800	190° 010°	2600	2.7 NM to RW01L	1.3 NM to RW01L
GP 3.00° TCH 48	010°	2600	1540	RW01L
	5.8 NM	3.3 NM	1.5 NM	1.3 NM
CATEGORY	A	B	C	D
LPV DA		845-3/4	219 (300-3/4)	
LNAV/VNAV DA		1126-13/8	500 (500-13/8)	
LNAV MDA	1080-1	454 (500-1)	1080-13/8	454 (500-13/8)
CIRCLING	1260-1 622 (700-1)	1280-1 642 (700-1)	1280-13/4 642 (700-13/4)	1380-21/2 742 (800-21/2)

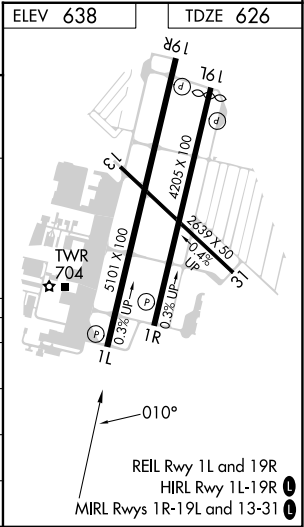

SC-1, 12 JUN 2025 to 10 JUL 2025

SC-1, 12 JUN 2025 to 10 JUL 2025