
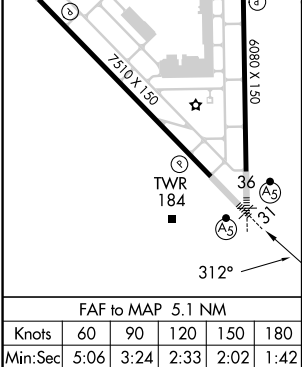


LOC/DME I-EKI 110.3 Chan 40	APP CRS 312°	Rwy Idg 7510 TDZE 43 Apt Elev 46
---	------------------------	---

LOC RWY 31
CORPUS CHRISTI INTL (CRP)

DME or RADAR required. RADAR required for procedure entry at ZULEX. For inop ALS, increase S-LOC 31 Cats C, D, and E visibility to 1 SM.	MALS R AS	MISSED APPROACH: Climb to 700 then climbing right turn to 2000 on heading 335° and CRP VORTAC R-287 to ATHIS INT/CRP VORTAC 23.3 DME and hold.
---	--------------	--

ATIS 126.8	CORPUS APP CON 120.9 348.725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269.15	CLNC DEL 118.55
----------------------	--	------------------------------------	--------------------------------	---------------------------

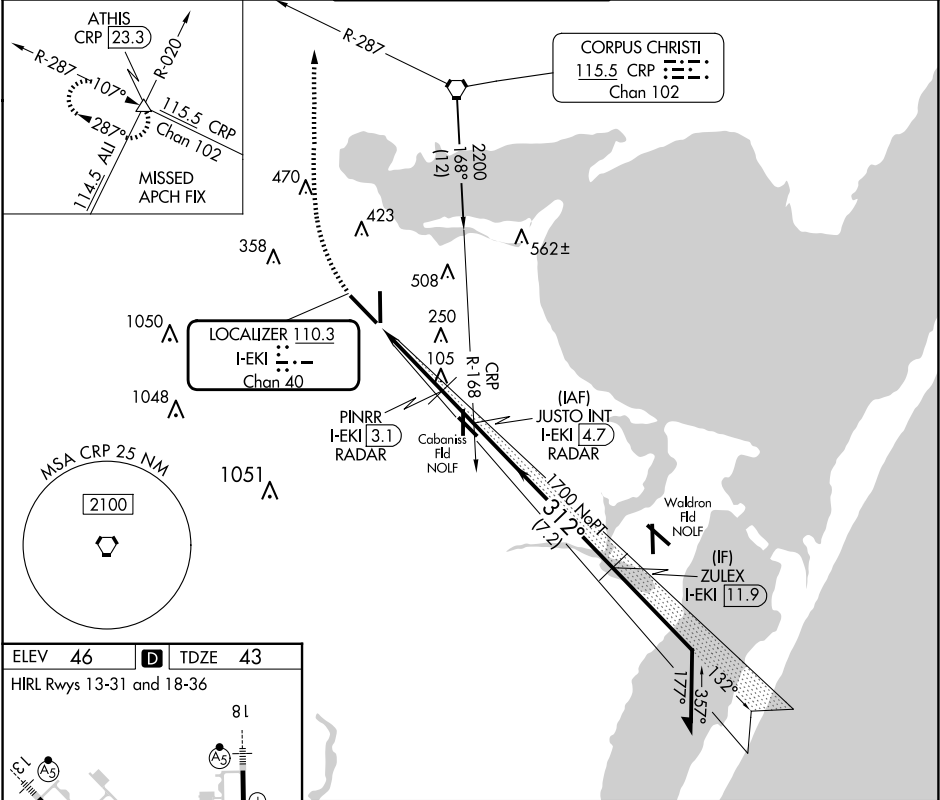

700 ↑	2000 hdg 335° CRP R-287	ATHIS △	JUSTO INT I-EKI 4.7 RADAR		Remain within 15 NM	
			2200	132°	2000	
I-EKI DME Antenna I-EKI 0.3 I-EKI 0.6			PINRR I-EKI 3.1 RADAR	312°	1700	
3.35° TCH 50			1300	VGSJ and descent angles not coincident (VGSJ Angle 3.00/ TCH 50).		
1			2.5 NM	1.6 NM		
CATEGORY	A		B	C	D	E
S-31	400-½		357 (400-½)	400-⅝ 357 (400-⅝)		
CIRCLING	500-1		780-1	820-2¼	820-2½	820-2¾
	454 (500-1)		734 (800-1)	774 (800-2¼)	774 (800-2½)	774 (800-2¾)