

MASON CITY MUNI (MCW)(KMCW) 5 W UTC-6(-5DT) N43°09.47' W93°19.88'

1213 B TPA—2013(800) ARFF Index—See Remarks NOTAM FILE MCW

RWY 18-36: H6501X150 (ASPH-GRVD) S-80, D-110, 2S-140,

2D-180 PCN 58 F/C/X/T HIRL 0.3% up N

RWY 18: MALS. VASI(V4L)—GA 3.0° TCH 39'.

RWY 36: MALS. PAPI(P4L)—GA 2.9° TCH 62'.

RWY 12-30: H5502X150 (ASPH-GRVD) S-80, D-110, 2S-140,

2D-180 PCN 45 F/C/X/T MIRL 0.3% up NW

RWY 12: REIL. PAPI(P4L)—GA 3.0° TCH 39'. Tree.

RWY 30: PAPI(P4L)—GA 3.0° TCH 51'. Bldg.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 12: TORA-5501 TODA-5501 ASDA-5501 LDA-5501

RWY 18: TORA-6501 TODA-6501 ASDA-6501 LDA-6501

RWY 30: TORA-5501 TODA-5501 ASDA-5501 LDA-5501

RWY 36: TORA-6501 TODA-6501 ASDA-6401 LDA-6401

SERVICE: S4 FUEL 100LL, JET A LGT Actvt HIRL Rwy 18-36; MIRL

Rwy 12-30; REIL Rwy 12; MALS Rwy 18; MALS Rwy 36; VASI

Rwy 18; PAPI Rwy 12; 30 and 36—CTAF. All PAPIs on durg dalgt hrs.

AIRPORT REMARKS: Attended 1300-2300Z. Airport operations

641-430-0980. For svc or fuel after hrs PPR call 641-430-9898.

Bird activity on and inofv arpt. Class I, ARFF Index A, ARFF Index B

provided. Rwy 30 is calm wind rwy. Due to rwy and twy end elevation

differentials and acft height; pilots may lose line of sight of other acft on opposing rwy and twy ends. All departure/arrival

acft use CTAF. Ldg fee for all commercial operated acft.

AIRPORT MANAGER: 641-421-3397

WEATHER DATA SOURCES: ASOS 120.300 (641) 255-0381.

COMMUNICATIONS: CTAF/UNICOM 123.0

RCO 122.6 (FORT DODGE RADIO)

® **MINNEAPOLIS CENTER APP/DEP CON** 127.3


CLEARANCE DELIVERY PHONE: For CD if una to ctc on FSS freq, ctc Minneapolis ARTCC at 651-463-5588.

AIRSPACE: CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE MCW.

(VH) (H) VORW/DME 114.9 MCW Chan 96 N43°05.69' W93°19.79' 353° 3.8 NM to fld. 1209/6E.

ILS 109.5 I-MCW Rwy 36. Class IE. LOC unusable byd 27° right of course.

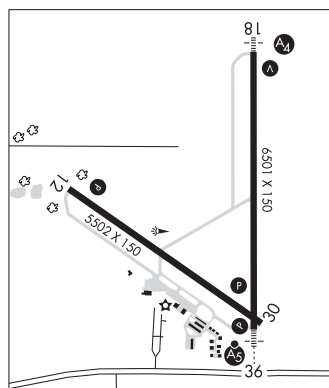

MATHEWS MEML (See TIPTON on page 78)