

APP CRS
138°

Rwy Idg
TDZE
611

Apt Elev
620

RNAV (RNP) Y RWY 13C


CHICAGO MIDWAY INTL (MDW)

RNP AR APCH - GPS.

▼ For uncompensated Baro-VNAV systems, procedure NA below -21°C or above 54°C.

MISSED APPROACH: Climb to 1100 then climbing right turn to 2600 direct EON VORTAC and hold.

D-ATIS 132.75	CHICAGO APP CON 128.2 353.875	MIDWAY TOWER 135.2 269.125	GND CON 118.075	CLNC DEL 124.625	CPDLC
-------------------------	---	--------------------------------------	---------------------------	----------------------------	-------

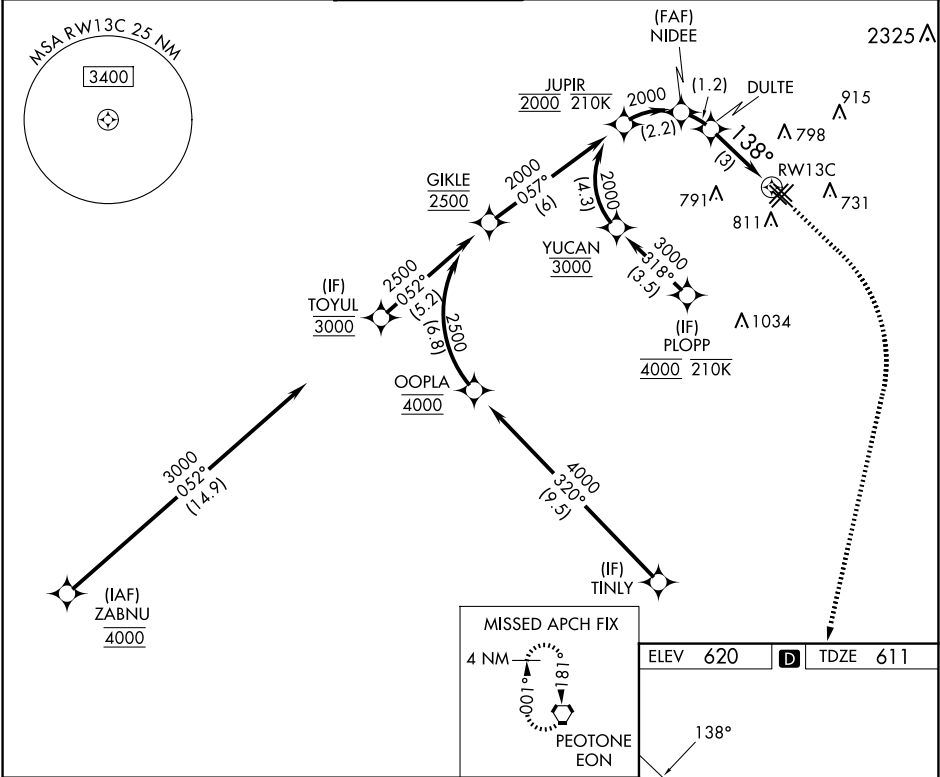

See planview for multiple IF locations.

JUPIR 2000

NIDEE 2000

DULTE 1609

RW13C

GP 3.00° TCH 46

2.2 NM

1.2 NM

3 NM

CATEGORY	A	B	C	D
RNP 0.10 DA		885/45	274 (300-7%)	
RNP 0.20 DA		1005/60	394 (400-1½%)	
RNP 0.30 DA		1051-1¼	440 (500-1¼%)	

AUTHORIZATION REQUIRED

HIRL Rwy 4R-22L and 13C-31C

MIRL Rwy 4L-22R, 13L-31R, and 13R-31L

REIL Rwy 4R, 22L, and 31C

RLS Rwy 13C and 31C