


WAAS CH 90245 W04A	APP CRS 045°	Rwy Idg TDZE 1425 Apt Elev 1425	4098
--	------------------------	---	-------------

RNAV (GPS) RWY 4

ALEXANDRIA RGNL/CHANDLER FLD (AXN)

RNP APCH - GPS.	MISSED APPROACH: Climb to 3000 direct KILVE and hold.
Rwy 4 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C.	

ASOS 118.375	MINNEAPOLIS CENTER 126.1 269.2	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

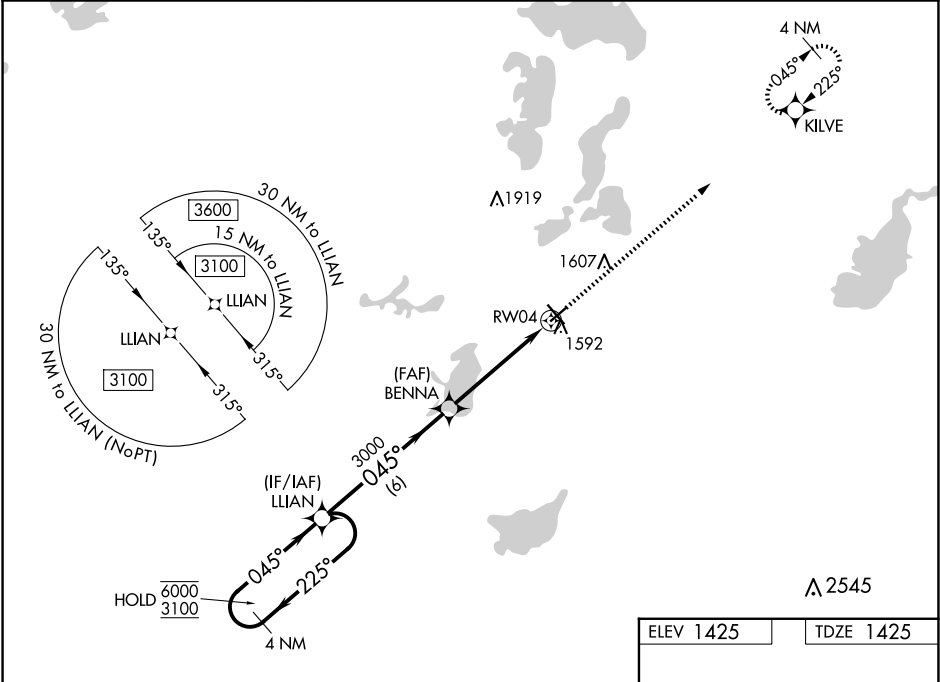

4 NM Holding Pattern		LIAN	3000	KILVE
6000 ← 225°		→ 045°	045°	↑
3100				✦
GP 3.00°				
TCH 44				
		6 NM	3.6 NM	1.2 NM
CATEGORY	A	B	C	D
LPV DA	1675-1 250 (300-1)			
LNAV/VNAV DA	1826-1½ 401 (500-1½)			
LNAV MDA	1860-1 435 (500-1)	1860-1¼ 435 (500-1¼)		
CIRCLING	1900-1 475 (500-1)	1940-1½ 515 (600-1½)	2000-2 575 (600-2)	

