

WAAS CH 81813 W31A	APP CRS 309°	Rwy Idg 5997 TDZE 174 Apt Elev 178
--	------------------------	--

RNAV (GPS) RWY 31
ALICE INTL (ALI)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using Nueces County altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Nueces County altimeter setting: increase LPV DA to 494 feet, LNAV/VNAV DA to 524 feet; increase all MDA 60 feet and LNAV Cat C and D, and Circling Cat D visibility ¼ SM. For inop ALS, increase all LPV and LNAV/VNAV visibilities to ¾ SM. For inop ALS with Nueces County altimeter setting, increase all LPV visibilities to ¾ SM and LNAV Cat C and D visibility to 1½ SM.

MALS



MISSED APPROACH:
Climb to 2100 direct
UWAGO and hold.

ASQS

119-225


KINGSVILLE APP CON ★

119.9 290.45


UNICOM

**123.0 (CTAF) **

MISSED APCH FIX




Procedure NA for arrivals at CRP VORTAC
on airway radials 169 CW 305.

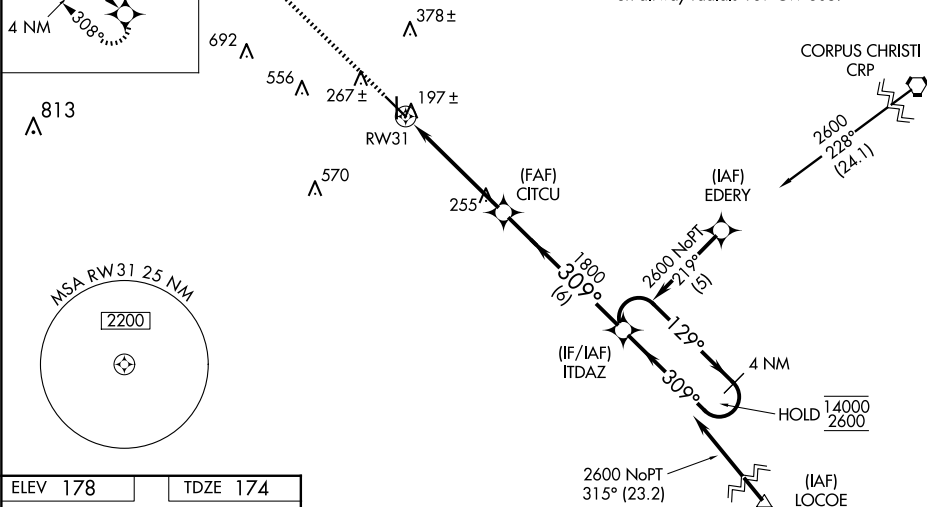

ELEV 178

TDZE 174

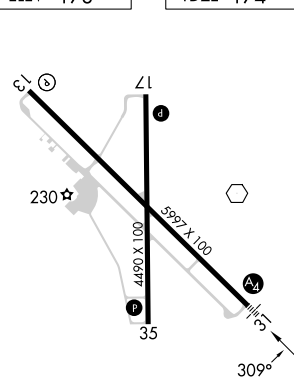REIL Rwy 13 **L**MIRL Rwws 13-31 and 17-35 **L**[illegible]