


WAAS CH 70709 W35D	APP CRS 350°	Rwy ldg TDZE 479 Apt Elev 501
--	------------------------	---


RNAV (GPS) Y RWY 35R
LOUISVILLE MUHAMMAD ALI INTL (SDF)

RNP APCH - GPS.				ALSF-2	MISSED APPROACH: Climb to 1600 then climbing right turn to 4000 direct TORAC and hold.
Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. Circling Rwy 11 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C.					

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6	CLNC DEL 126.1 275.8	CPDLC
--------------------------	--	--	-------------------------------	--------------------------------	-------

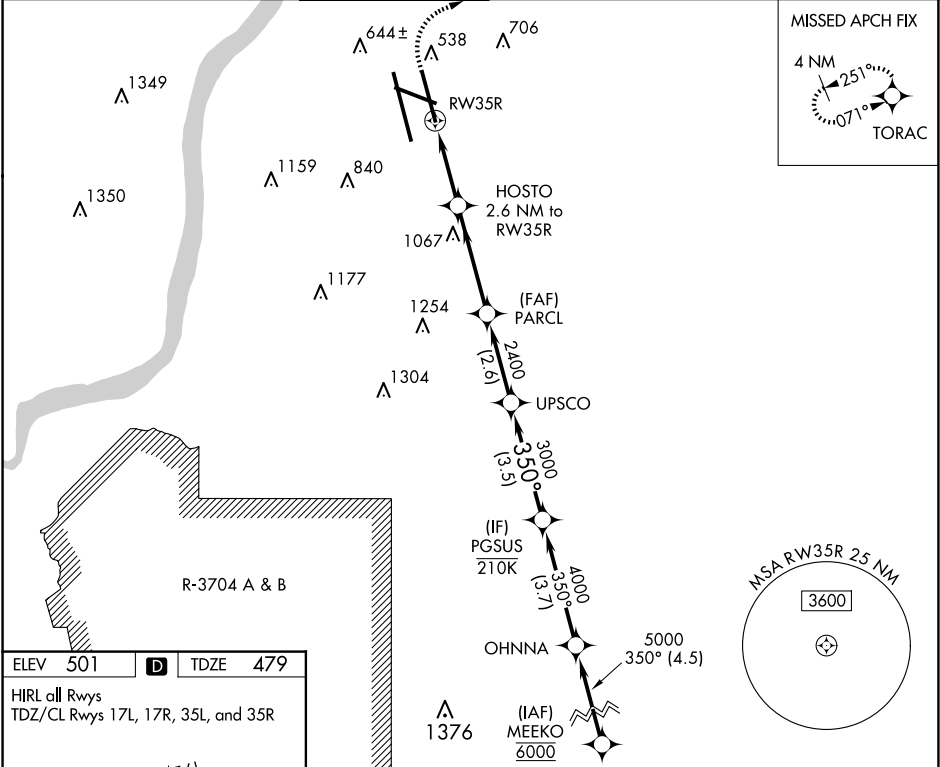

ELEV 501	D	TDZE 479
HIRL all Rwys TDZ/CL Rwys 17L, 17R, 35L, and 35R		

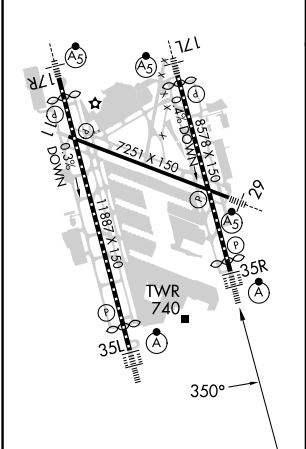

1600 4000 TORAC				VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).	
				PGSUS 4000	
1.4 NM to RW35R				350°	
1.4 1.2 NM 3.3 NM 2.6 NM 3.5 NM				GP 3.00° TCH 60	
CATEGORY	A	B	C	D	
LPV DA	679/18		200 (200-1/2)		
LNAV/VNAV DA	901/40		422 (400-3/4)		
LNAV MDA	1000/24	521 (500-1/2)	1000/55	521 (500-1)	
CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1160-1 3/4 659 (700-1 3/4)	1400-3 899 (900-3)	

SE-1, 15 MAY 2025 to 12 JUN 2025

SE-1, 15 MAY 2025 to 12 JUN 2025