

WAAS CH 40433 W23A	APP CRS 234°	Rwy Idg TDZE Apt Elev	3601 3204 3204
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 23


RAPID CITY RGNL (RAP)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Ellsworth AFB altimeter setting and increase all DA 25 feet and all MDA 40 feet. VDP and Baro-VNAV NA when using Ellsworth AFB altimeter setting.

MISSED APPROACH: Climbing left turn to 5300 direct EWEBU and hold.

ASOS 118.525	ELLSWORTH APP CON ★ 119.5 259.1	RAPID CITY TOWER ★ 125.85 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
------------------------	---	--	-------------------------	-------------------------

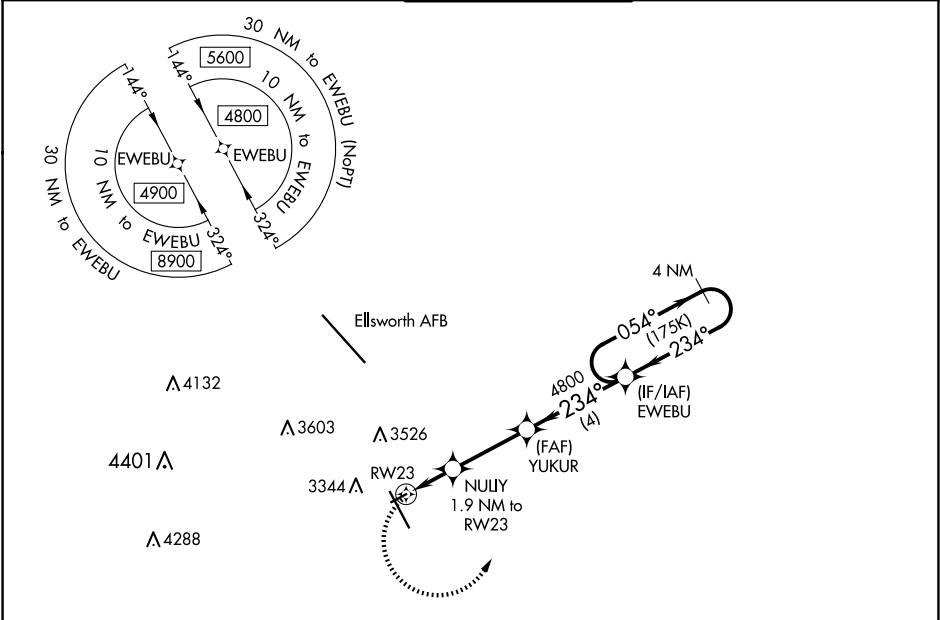

ELEV 3204 D TDZE 3204					
5300 EWEBU *LNAV only. *1 NM to RW23 1.9 NM to RW23 3820* 1 NM 0.9 NM 3 NM 4 NM		YUKUR 4800 EWEBU 4800 4 NM Holding Pattern 234° 054° 234° GP 3.00° TCH 38			
CATEGORY	A	B	C	D	
LPV DA	3454-1	250 (300-1)		NA	
LNAV/VNAV DA	3454-1	250 (300-1)		NA	
LNAV MDA	3560-1	356 (400-1)		NA	
CIRCLING	3660-1 456 (500-1)	3840-1 636 (700-1)		NA	

REIL Rwy 14 0

MIRL Rwy 5-23 0

HIRL Rwy 14-32 0

3224

TWR 3233

AS 32

0.6% DOWN

0.8% UP

0.5% UP

3601 X 75

8201 X 150

234°

23°

054°

234°