REDMOND

ROBERTS FLD (RDM)(KRDM) 1 SE UTC–8(–7DT) N44º15.24´ W121º09.00´ **KLAMATH FALLS**
3082 B Class I, ARFF Index B NOTAM FILE RDM MON Airport **H–1B, L–13A**
IAP, AD

RWY 05–23: H7038X150 (ASPH–GRVD) S–120, D–216, 2S–140, 2D–399 PCR 530 F/A/X/T HIRL 0.3% up SW
RWY 05: REIL. VASI(V4L)—GA 3.0º TCH 50´.
RWY 23: MALSR. PAPI(P4L)—GA 3.0º TCH 51´.
RWY 11–29: H7006X100 (ASPH–GRVD) S–109, D–178 PCR 530 F/A/X/T MIRL 0.5% up SE
RWY 11: REIL. PAPI(P4L)—GA 3.0º TCH 50´.
RWY 29: REIL. PAPI(P4L)—GA 3.0º TCH 50´.

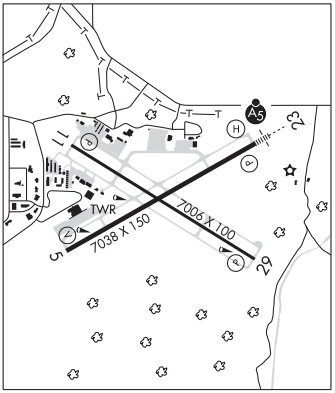

RUNWAY DECLARED DISTANCE INFORMATION
RWY 05: TORA–7038 TODA–7038 ASDA–7038 LDA–7038
RWY 11: TORA–7006 TODA–7006 ASDA–7006 LDA–7006
RWY 23: TORA–7038 TODA–7038 ASDA–7031 LDA–7031
RWY 29: TORA–7006 TODA–7006 ASDA–7006 LDA–7006

SERVICE: S4 **FUEL** 100LL, JET A **OX** 1, 2 **LGT** When twr clsd
ACTIVATE HIRL Rwy 05–23; MIRL Rwy 11–29; MALSR Rwy 23; REIL Rwy 05, Rwy 11 and Rwy 29; twy lgts—CTAF. PAPI Rwy 29 unusbl byd 5 NM from thld, does not provide obstn clnc.

AIRPORT REMARKS: Attended 1200–0400Z‡. For fuel aft hrs call FBO 541–504–3848. Pilots conducting EFVS ops; be aware LED ALS in use Rwy 23. UNICOM: FBO 122.85. Tran helicopter ops preferred north (conc) general aviation ramp. Ocnl wildlife on and invof arpt. Cold temperature airport. Altitude correction required at or below –17C. Terminal apron not avbl for general aviation acft. Helipad H1 pvt use only.

AIRPORT MANAGER: (541) 504-3085

WEATHER DATA SOURCES: ASOS 119.025 (541) 504–8743.

COMMUNICATIONS: CTAF 124.5 **ATIS** 119.025 541–548–1742 **UNICOM** 122.95
REDMOND RCO 122.5 (MC MINNVILLE RADIO)
Ⓡ **SEATTLE CENTER APP/DEP CON** 126.15
REDMOND TOWER 124.5 (1400–0600Z‡) **GND CON** 121.8

CLEARANCE DELIVERY PHONE: For CD if una to ctc on FSS freq, ctc Seattle ARTCC at 253-351-3694.

AIRSPACE: CLASS D svc 1400–0600Z‡; other times CLASS E.

RADIO AIDS TO NAVIGATION: NOTAM FILE RDM.
DESCHUTES (VH) (H) VORTACW 117.6 DSD Chan 123 N44º15.17´ W121º18.21´ 071º 6.6 NM to fld. 4103/18E.
VOR unusable:
013º–023º byd 40 NM
034º–039º byd 40 NM
108º–119º byd 40 NM
125º–135º byd 40 NM
150º–163º byd 40 NM
188º–201º byd 40 NM blo 10,500´
188º–201º byd 69 NM
202º–219º byd 40 NM
220º–240º byd 30 NM
241º–252º byd 40 NM blo 13,000´
241º–252º byd 47 NM
253º–257º byd 40 NM
258º–268º byd 40 NM blo 10,000´
258º–268º byd 48 NM
280º–286º byd 40 NM
289º–305º byd 40 NM blo 12,500´
289º–305º byd 48 NM
326º–338º byd 40 NM
TACAN AZIMUTH unusable:
220º–240º byd 30 NM
DME unusable:
220º–240º byd 30 NM
ILS/DME 109.1 I–RDM Chan 28 Rwy 23. Class IE.

COMM/NAV/WEATHER REMARKS: ATC radar svc provided within 40 NM radius by Seattle Ctr to transponder equipped acft only. RDM ATCT does not provide ATC radar svc.

• • • • • • • • • • • • • • • • • • •

HELIPAD H1: H48X48 (CONC)

REDMOND N44º15.25´ W121º09.15´ **KLAMATH FALLS**
RCO 122.5 (MC MINNVILLE RADIO) **L–13A**

ROBERTS FLD (See REDMOND on page 209)